



ROUTE	STATE	DISTRICT	SHEET NO.
	MO		
JOB NO.			
CONTRACT ID.			
PROJECT NO.			
COUNTY			DATE

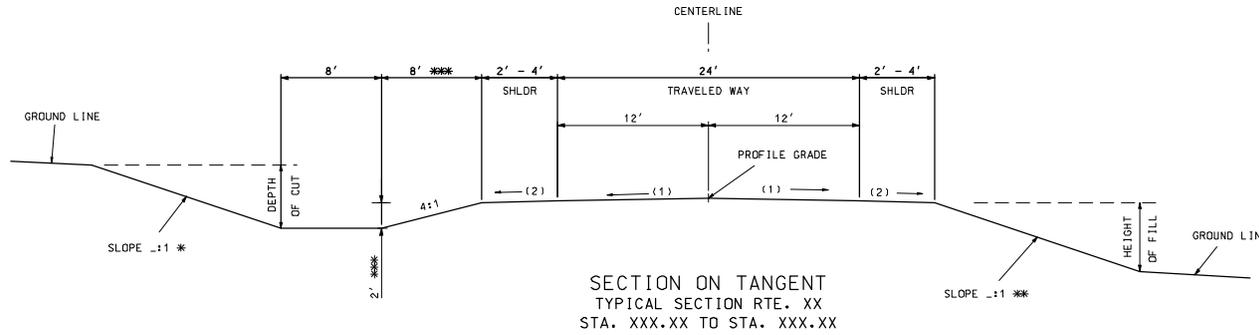

CROSS SLOPE
 (1) 2.0%
 (2) 4.0%
 (3) S.E. SLOPE IF GREATER THAN 4.0%.

SEE STANDARDS 203.20, 606.00 AND 609.40 FOR SHOULDER WIDENING.

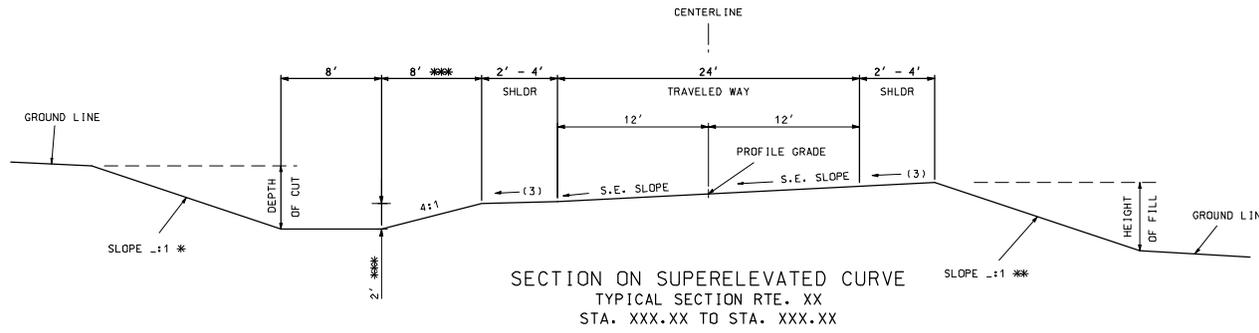

SHOULDER WIDTH IS 2' - 4' BASED UPON TRAFFIC VOLUME, PERCENT TRUCKS AND THE CONTEXT OF THE SURROUNDING ROAD.

+ SPOT IMPROVEMENTS SHOULD MATCH EXISTING TEMPLATE.

- * BACKSLOPE DETERMINED BY SOIL SURVEY.
- ** THE FILL SLOPE SHALL BE 4:1 OR FLATTER WHEN THE FILL HEIGHT IS EQUAL TO OR LESS THAN 2 FEET (I.E., THE OFF-SET FROM THE TOE OF FILL TO THE SHOULDER POINT IS A MINIMUM OF 8 FEET). THE SLOPE MAY VARY TO MEET THIS REQUIREMENT. FOR FILL HEIGHTS GREATER THAN 2 FEET, THE SLOPE SHALL NOT EXCEED THE MAXIMUM SLOPE DETERMINED BY THE SOIL SURVEY.
- *** 4' DITCH DEPTH PREFERRED IF ALTERNATE 18" ROCK BASE IS USED. SIDESLOPE WIDTH SHALL BE 16' FOR 4' DITCH DEPTH.

	D-64E
FUNCTION	MINOR RURAL ROADWAY
ADT	N/A
TRAVELED WAY WIDTH	24' +
ROADBED WIDTH	28' - 32' +
FORESLOPE	4:1
DITCH	2'