


616.8.37 (TA-37) Lane Closure of Interior Lane on Multi-Lane Highways - MT

SPEED	SIGN SPACING (ft.)		TAPER LENGTH (ft.)		OPTIONAL BUFFER LENGTH (ft.) (B)	CHANNELIZER SPACING (ft.)	
	Undivided (S)	Divided (S)	Shoulder (1) (T1)	Lane (2) (T2)		Tapers	Buffer/ Work Areas
0-35	-	200	70	245	280	35	40
40-45	-	500	150	540	400	40	80
50-55	-	1000	185	660	560	50	80
60-70	-	SA - 1000 SB - 1500 SC - 2640	235	840	840	60	120

1 Shoulder taper length based on 10 ft. (standard shoulder width) offset. 2. Lane taper length based on 12 ft. (standard lane width) offset.

	SIGN HEIGHT	MAXIMUM WORK ZONE LENGTH (L)
URBAN	1' Portable 7' Post	1 Mi.
RURAL UNDIVIDED	1' Portable 7' Post	2 Mi.

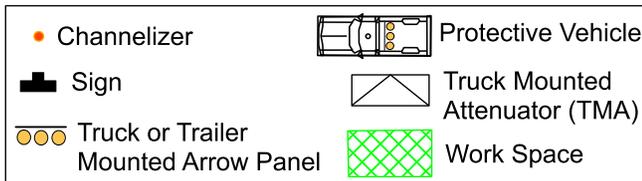

This typical application applies to lane closures of lane 2 of 3, lanes 2 or 3 of 4, lanes 2 or 4 of 5, lanes 2 or 5 of 6, and lanes 2 or 6 of 7.

This typical application is applicable to work being performed when capacity is not an issue. If capacity is an issue, refer to EPG 616.8.38 (TA-38) Lane Closure of Interior Lane on Multi-Lane Highways for Capacity.

A protective vehicle shall be used while work is in progress. The protective vehicle shall be equipped with a TMA and flashing arrow panel and positioned at least 150 ft. in advance of the work space.

Supplemental warning methods may be used to call attention to the work zone.

Signs shown on the left side of this typical application may be omitted on undivided highways.

For long-term operations, refer to EPG 616.6.2.2 Flags and Advance Warning Rail System.

For nighttime operations, review EPG 616.6.83 WARNING LIGHTS for use of sequential lights.

SEE EPG 616.12 WORK ZONE SPEED LIMITS FOR SPEED LIMIT GUIDELINES.

