
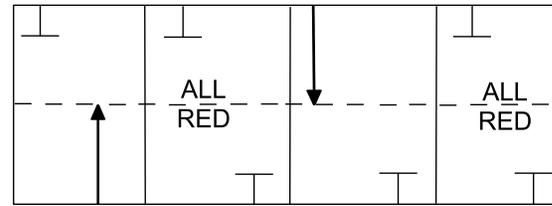




616.8.12a (TA-12a) Portable Traffic Signal, Temporary Traffic Sign, and Concrete Barrier Details - DE/CM

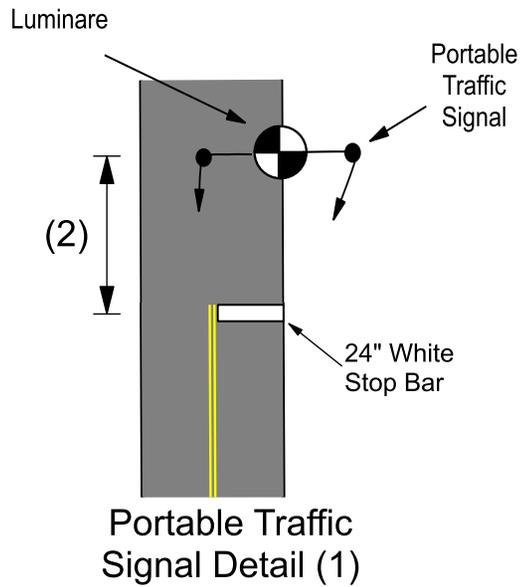

PHASE A **PHASE B**
 Phase A and phase B shall always be followed by an all red phase or interval.
 Signals shall rest in all red when there are no vehicle calls.

Notes:

- (1) Signing and pavement marking identical on both approaches.
- (2) 75-feet recommended spacing. Spacing may be between 40-feet and 150-feet.
- (3) Non-intrusive detection is preferred. However, if other vehicle interference is present (i.e. parking lots or side road activity), then other detection methods may be used.
- (4) If side roads or driveways occur within the limits of the stop bars, additional indications and phasing are required. Furthermore, right turns shall be prohibited from these access points during the red interval.
- (5) Flare barrier to extend beyond clear zone or flare barrier to edge line and use approved end treatment.

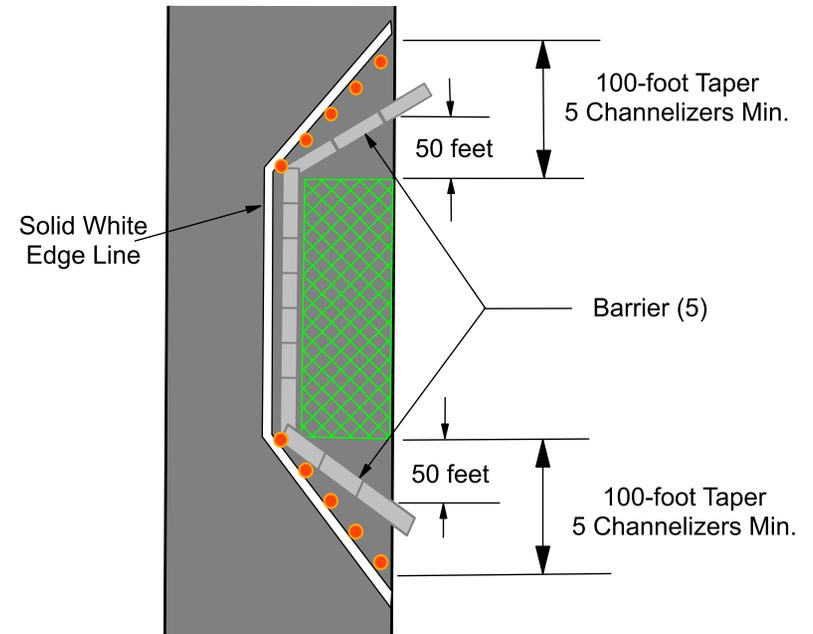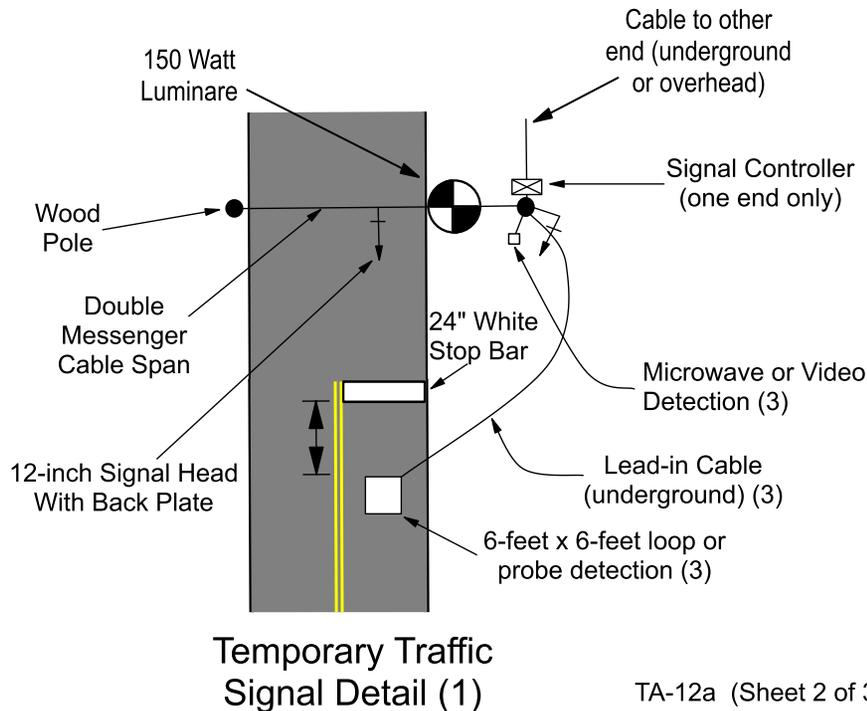

Temporary Traffic Signal Detail with Barrier (1)